

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 January 2002 (10.01.2002)

PCT

(10) International Publication Number
WO 02/03729 A1

(51) International Patent Classification⁷: **H04Q 7/22**,
11/04, 7/36

(21) International Application Number: **PCT/EP01/07240**

(22) International Filing Date: **25 June 2001 (25.06.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
0016064.8 **30 June 2000 (30.06.2000)** **GB**

(71) Applicant: **NOKIA OY [FI/FI]**; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors: **SALO, Janne**; Noppakatu 6 B 3, FIN-20660 Littoinen (FI). **AALTONEN, Janne**; Hirvikoirankatu 15, FIN-20900 Turku (FI). **WALSH, Rod**; Ruskontie 6 C 16,

FIN-33710 Tampere (FI). **WASKO, Stephen**; Koskitie 28 B 15, FIN-90500 Oulu (FI). **REPONEN, Kari**; Kukkulantie 15, FIN-90910 Kontio (FI).


(74) Agents: **JOHNSON, Ian et al.**; Nokia House, Summit Avenue, Farnborough, Hampshire GU14 ONG (GB).

(81) Designated States (*national*): AB, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: **IMPROVEMENTS IN AND RELATING TO DATA DELIVERY OVER A CELLULAR RADIO NETWORK**

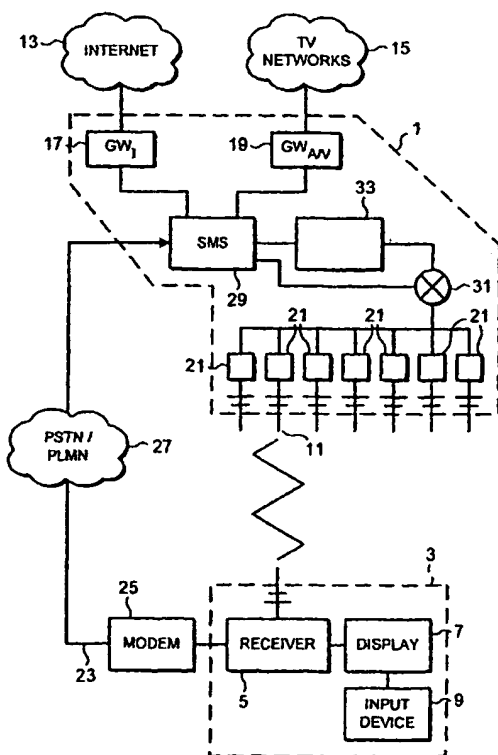

(57) Abstract: A broadband digital broadcast (1) network is described in which the cellular topology is dynamically configurable to maintain spectral efficiency. The reconfiguration of the topology occurs in response to changes in the demand for content. Thus, a single cell could be defined to cover an area in which the same content is being delivered to a substantial number of users. Conversely, a large number of cells could be defined to cover an area in which a substantial number of users are each having different content delivered to them.

WO 02/03729 A1



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

Improvements in and relating to data delivery over a cellular radio network

5

The present invention relates to content delivery over a cellular radio network, particularly although not exclusively a broadband digital broadcast network.

10 In a cellular radio network, each cell may be capable of transmitting content on a particular frequency chosen to meet the frequency re-use requirements of the network. The spectral efficiency of such a network is reduced if the network is capable of delivering content, as in the case of a broadband digital broadcast network, as a broadcast to every cell in the network or as a multicast to a subset of cells in the network. Such a situation arises in the
15 case of the well-known terrestrial Digital Video Broadcasting (DVB-T) system found in Europe.

Figure 1, illustrates a prior art broadband digital broadcast network which lacks spectral efficiency as the same content is being delivered using different
20 frequencies in different cells. Thus, in the Figure, the network 1 is made up of a plurality of cells A to K utilising seven frequencies f1 to f7 and content is being multicast to terminals in cells A, B and C on three respective frequencies namely f1, f2 and f3.

25 Thus, according to a first aspect of the present invention, there is provided a broadcast system for delivering content to a terminal, including a plurality of transmitters, the transmission characteristics of which define a network topology and a network controller responsive to distribution of demand for specific content to determine an appropriate network topology by varying the
30 transmission characteristics of at least one of the transmitters.

- Consequently, there is a resulting improvement in the spectral efficiency of the network. In particular, it is possible to utilise more effectively the available bandwidth in areas served by both local and overlying regional cells. Advantageously, the topology of the network may be configured to meet a
- 5 predetermined demand for a service. Such a demand could arise where an advertisement is intended to be pushed by a third party such as a content provider. Alternatively, the predetermined demand could arise from service covering a "live event" such as a sporting fixture at a stadium, for example.
- 10 Where the service is on a "pay-for-view" basis, an appropriate conditional access scheme could be utilised to prevent unauthorised access to the content which is not, of course, restricted to visual data. A description of an application of conditional access to the delivery of content over a broadband digital broadcast network can be found in the European Telecommunication
- 15 Standards Institute (ETSI) Publication entitled – Digital Video Broadcasting (DVB) - Guidelines on implementation and usage of service information (SI) – ETR – 211. This publication contains further references to other publications useful in understanding Conditional Access.
- 20 Preferably, the system will signal changes in the cell size due to the change in network topology to terminals receiving the content. Such signalling could be delivered with the content or provided on a separate bearer such as via a cellular mobile handset either integrated with the terminal or linked thereto. Thus, each terminal will have access to service information which will permit
- 25 the terminal to follow a broadcast as its parameters change in response to a reconfiguration of the topology. Conveniently, the controller will configure the topology by altering transmitter characteristics, including, but not limited to the following operational characteristics, namely transmission power, direction, frequency and time slots. Consequently, the relative size of a cell delivering
- 30 content may be varied to meet the demand for common, that is the same content and also different content in areas covered by the system. As an alternative to a network controller led change in network topology, such a

change could be initiated by a request from a terminal. An example of a terminal led change might arise where the terminal was being used to co-ordinate an emergency situation and further network resources were need in the incident area to assist in dealing with the emergency situation. In a further
5 alternative to a network controller led change in topology, a service provider outside of the network might firstly seek confirmation that the terminals could receive content following a potential network reconfiguration. Subsequently, when sufficient terminals have responded in the affirmative, the service provider would authorise reconfiguration.

10

According to a further aspect of the invention, there is provided a method of delivering content to terminals over a network whose topology is defined by the transmission characteristics of a plurality of transmitters, comprising analysing the content to be delivered together with its destination and varying
15 the transmitter transmission characteristics accordingly.

Preferably, the number of cells defined by the transmitters is reduced in an area in which substantially the same content is being delivered to terminals. Similarly, the number of cells defined by the transmitters is increased in an
20 area in which different content is being delivered to terminals.

According to a still further aspect of the invention, there is provided a broadcast system having a plurality of transmitters for delivering content to terminals in respective locations each transmitter operating in accordance with
25 a set of operational characteristics comprising:
means for determining a distribution of terminals for delivery of common content; and
means for varying the operational characteristics of a transmitter responsive to the determined distribution of terminals.

30

According to a yet further aspect of the invention, there is provided a method using a plurality of transmitters for delivering content to terminals in respective

locations comprising determining a distribution of terminals receiving common content and varying a set of operational characteristics of a transmitter responsive to the distribution of terminals.

- 5 According to a yet further aspect of the invention, there is provided a terminal for receiving content from a broadcast network having a plurality of transmitters for delivering content to terminals in respective locations each transmitter operating in accordance with a variable set of operational characteristics, the terminal comprising means operable to receive a signal
10 indicative of the operational characteristics of a transmitter whereby the receiving means is operable to receive content delivered in accordance with the signal.

- According to yet another aspect of the invention there is provided a method of
15 receiving content from a broadcast network having a plurality of transmitters each transmitter operating in accordance with a variable set of operational characteristics, the method comprising receiving a signal indicative of operational characteristics of a transmitter delivering said content and changing reception characteristics in accordance therewith

20

In order to aid in understanding the present invention, a particular embodiment thereof will now be described by way of example and with reference to the accompanying drawings, in which:

- 25 Figure 1 is a diagram illustrating a typical prior art cellular network structure;
Figure 2 is a diagram illustrating a broadband digital broadcast network according to the invention;
Figure 3 is a diagram illustrating a topology of the network of Figure 2;
Figures 4a, 4b and 4c are each a graphical representation of a particular
30 content delivery scenario in the network of Figure 2;
Figure 5 is a diagram illustrating a further topology of the network of Figure 2;
and

Figure 6 is a diagram illustrating a still further topology of the network of Figure 2.

Referring to Figure 2, this shows an example of a terrestrial broadband digital broadcast network namely a digital video broadcast (DVB-T) network 1. A user equipped with a suitable terminal 3 incorporating a receiver 5, display 7 and user interface 9, can receive data broadcast by the network 1 from a transmitter 11 forming part of the network 1. The data broadcast by the transmitter 11 is derived from a variety of sources 13,15 via gateways 17,19 and may respectively include IP and Television content.

Before transmission, the data received from each source 13,15 is processed in head-end equipment 21. As is well known in the art, the head end equipment places the data into MPEG-based data containers. To cater for the delivery of data to a particular terminal 3 or group of terminals, the containers may also hold address information which can be identified and read by a conditional access component in the terminal 3 to determine whether the data is intended for that terminal. The network 1 also provides the facility for suitably equipped terminals to interact with the network. By suitably equipped terminal 3 is meant a terminal having a return channel for providing network interactivity as exemplified in the case of DVB by a number of specifications published by the Digital Video Broadcasting Office and also the European Telecommunications Standards Institute (ETSI) including the following: DVB-NIP Network Independent Protocols for DVB Interactive Services ETS 300 802 (V1: 11/97), Guidelines for the use of the Network Independent Protocols for DVB Interactive Services TR 101 194 (V1.1.1: 06/97), DVB-RCP DVB interaction channel through the Public Switched Telecommunications System (PSTN) / Integrated Services Digital Network (ISDN) ETS 300 801 (V1: 08/97), DVB-RCG Interaction channel through the Global System for Mobile communications (GSM) EN 301 195 (V1.1.1 : 02/99).

Thus, a user may request the delivery of a computer file from the network to her terminal. Such interactive functionality requires a return channel 23 from
5 the terminal 3 to the DVB-T network 1 and a conditional access component in the terminal 3. The return channel 23 can be provided in the form of a dial-up connection using a modem 25 connected to the terminal 3 which establishes a connection over a telecommunications network 27 to a subscriber management system (SMS) 29 of the DVB-T network 1. The subscriber
10 management system 29 has connections to both the gateways 17,19 and the transmitter head-end equipment 21. It is thus possible for the user to issue requests for specific content via the user interface 9 of the terminal 3. The request is received by the SMS 29 which obtains the content from the relevant gateway 17,19 and passes it to the head-end 21 for placing into data
15 containers for onward transmission. It should be noted that the request from the user might include content which is not presently being transmitted by the network 1. To ensure that the user only receives the requested content, the data is broadcast with an identifier which the conditional access component in the terminal 3 recognises as being intended for delivery to the user. In the
20 event that the content is received by another terminal, the conditional access component of that terminal will prevent delivery of the content.

The network further includes a router 31 which ensures that content is delivered to the head end 21 of the correct transmitter 11 or transmitters in
25 accordance with instructions received from a controller 33. The controller 33 monitors the requests for content being handled by the SMS 29. Depending on the nature of the requests being received, the controller 33 will ensure an appropriate allocation of transmitters and frequencies to deliver the content whilst at the same time seeking to maintain the spectral efficiency of the
30 network 1 over time. Thus, the controller 33 will identify not only what content is being requested but also to where it is to be delivered. In order that the controller 33 is able to reconfigure the network dynamically to meet demand,

the controller 33 can instruct a change in the power of a transmitter, a change in transmission direction of a transmitter, a change in a transmission frequency of a transmitter and also switch on/off a transmitter.

5 Turning to Figure 3, there is shown a network structure made up of eleven areas corresponding to cells A to K, to which have been allocated seven frequencies f1 to f7. Three different scenarios relating to the number and nature of requests for delivery in each area of the network are illustrated in Figures 4a, 4b and 4c. The graphs set out in the Figures represent the
10 number of requests for delivery in each area using two separate columns. The left hand (unhatched) column for each area represents the total number of requests for delivery of unique content, that is content for delivery to a particular terminal which content is not simultaneously being delivered to any other terminal in that network. An example of such a content could be a page
15 of a particular website. The right hand hatched column is indicative of the number of requests for delivery of common content, that is content for delivery to a particular terminal which content is being simultaneously delivered to other terminals in the network. An example of such content might be the delivery of commentary for a sporting event.

20 With respect to the scenario illustrated in Figure 4a, it is apparent that in no area are there any requests for common content. Thus the controller 33 having been provided with the information illustrated in the Figure i.e. what content is being delivered and where is it to be delivered, recognises that the
25 spectral efficiency of the network 1 can be optimised by adopting a unicast configuration in which distinct frequencies are allocated to each area for delivery of content to the terminals. Thus, the network configuration or topology adopted will in fact be illustrated by Figure 3.

30 Figure 4b illustrates a scenario in which a large number of requests for delivery of common content are present in areas A, B and C. In addition, a smaller number of delivery requests for common content are present in area

H and area I. It should also be noted that no requests are present for unique content in area A and the number of such requests in areas B and C are significantly outnumbered by the requests for common content. The controller 33 having been provided with the information illustrated in the Figure, recognises that the spectral efficiency may be improved in the areas A B and C by reconfiguring the transmitter in area A to deliver the common content to those three areas on a single frequency f1 the extent of coverage being shown by the large hexagon 35 in Figure 5. Area A is selected by the controller 33 to be the best choice for reconfiguring in this instance because no unique content is required for delivery to terminals in that area. At the same time, the controller 33 instructs the router 29 to deliver the unique content to terminals in area B and area C using a dedicated frequency in each case, namely f2 and f3 respectively. The controller 33 also recognises the presence of requests for common content delivery in areas G and I as has already been mentioned. In this case, the controller deems, in accordance with a pre-determined threshold that the relatively low number of requests for common content in these areas together with the absence of any geographical proximity renders further reconfiguration of the network unnecessary

Figure 4c, illustrates a scenario where all the delivery requests in the network 1 are for common content. In these circumstances the controller 33 having been provided with the information illustrated in the Figure 4c, recognises that the spectral efficiency may be improved by configuring the network as a single frequency network (SFN) as shown in Figure 6. Thus, the transmitters 11 in areas A and K both presently operating on f1 have their output boosted so that their respective areas of coverage are shown as the two large hexagons 37,39 on Figure 7. In a non-illustrated variant, rather than select the transmitters 11 in area A and area K to deliver the content at f1, a SFN could be configured by selecting area F and area I and having them transmit the content on f2, for example. Clearly, this would necessitate further changes to the network 1 to avoid interference with content being delivered by areas H

and B, hitherto operating on frequency f2. Thus areas H and B could be reconfigured to operate on a different frequency or even turned off. Alternatively, in a non-illustrated variant, the same result could be achieved by switching the frequency of all cells in the network to f1 to form an SFN.

5

Another scenario could arise where a regional broadcast cell (not shown) is superimposed on areas A to K, using frequency f8. In normal conditions, the presence of this regional cell would have no impact on the operation of the topology of the cellular structure beneath it which would continue to operate in the manner exemplified by the scenarios referred to above. However, should the demand for content delivered over the regional broadcast cell exceed the available bandwidth, rather than deny service to terminals 3, the controller 33 could, in response to such an event, allocate some of the underlying area frequencies to the regional broadcast, at least for the period of excess demand on the regional broadcast cell. Although this would temporarily reduce the bandwidth available for local area content delivery, it would have an overall effect of improving spectral efficiency. However, care would need to be taken by the controller in assigning bandwidth from the underlying areas so as not to remove bandwidth from so-called guaranteed services, an example being a local broadcaster providing content such as commercial radio.

It will be recognised by those skilled in the art that as a result of the change in network topology described above, the terminals receiving the content must be made aware of service changes, for example, changes in the frequency of transmissions carrying the desired content. Information relating to service changes is generated by the controller 33 and is carried in-band with the content for delivery to a terminal 3 effected by the change. In the case of a DVB network 1 for example, the service change information could be implemented under the Service Delivery/Service Announcement Protocols (SDP/SAP) of the Internet Protocol (IP) suite. These protocols are then used to announce, cancel and re-assign parameters of service including start and

end times, IP address, frequency and the like. Although such messages would usually be processed by the processor without user intervention at the User Interface (UI) level an example of some such messages in human readable form could include "the file download continues in n seconds on
5 frequency f " where n and f are defined. The terminal would then respond by changing to the new frequency to continue with the download. Another message might be "this service has now terminated on this frequency, please consult the service descriptors to find out its new location" in which case the terminal would check a previously downloaded set of service information (SI)
10 data to find the service location or consult a service information channel provided over the network. In all the above cases, the messaging will be unidirectional in the sense that no acknowledgement is needed of receipt.

It will be appreciated by those skilled in the art that, the physical separation of
15 the transmitters on the same frequency (but with different content) needs to be sufficient to ensure that a sufficient carrier to interference ratio (C/I) is maintained. As a rough approximation, the C/I can be calculated from the cellular topology of Figure 3 in which the cell size is uniform. Thus, on the assumption that cells A and I are transmitting at the same level and on the
20 same frequency (but with different content) and assuming the distance from A to the edge of its cell is d , then the distance from I to the edge of cell A is $3*d$. Assuming, also, a roughly approximate propagation loss factor of 35 dB per decade (10 times) distance, this leads to a C/I value of about 17 dB. This is sufficient to receive up to 17 Mbps data through the DVB system, for example.
25 If higher rates are needed, then either a larger physical separation is needed or the cells must be isolated further by antenna design or through utilising obstructions (e.g. buildings).

What is claimed is:

1. A broadcast system for delivering content to a terminal, including a plurality of transmitters, the transmission characteristics of which define a network topology and a network controller responsive to distribution of demand for specific content to determine an appropriate network topology by varying the transmission characteristics of at least one of the transmitters.
2. A system as claimed in Claim 1, including signalling means providing information relating to the network topology for delivery to a terminal.
3. A system as claimed in any one of Claims 1 to 3, wherein the network controller is operable to modify the topology to reduce the number of cells in an area to which the same content is being delivered.
4. A system as claimed in any one of Claims 1 to 4, wherein the network controller is operable to modify the topology to increase the number of cells in an area to which different content is being delivered.
5. A system as claimed in any one of Claims 1 to 4, including a further transmitter delivering content to an area overlying at least the network topology determined by the controller.
6. A system as claimed in Claim 5, wherein the network controller is operable modify the topology to deliver, in at least one cell, the content being delivered by the further transmitter.
7. A system as claimed in any one of Claims 1 to 6 wherein at least two transmitters comprise said plurality of transmitters.

8. A system as claimed in any one of Claims 1 to 7, wherein said transmitter characteristics are varied in respect of one or more of the following, namely frequency, antenna directivity or transmission power.
- 5 9. A method of delivering content to terminals over a network whose topology is defined by the transmission characteristics of a plurality of transmitters, comprising analysing the content to be delivered together with its destination and varying the transmitter transmission characteristics accordingly.
- 10 10. A method as claimed in Claim 9, wherein the transmitter characteristics are varied such that cellular density of the topology is reduced in an area where substantially the same content is being delivered to terminals,
- 15 11. A method as claimed in Claim 9 or Claim 10, wherein the transmitter characteristics are varied such that the cellular density of the topology is increased in an area where substantially different content is being delivered to terminals.
- 20 12. A computer program comprising executable code for execution when loaded on a computer, wherein the computer is operable in accordance with said code to carry out the method according to any one of Claims 9 to 11.
- 25 13. A computer program as claimed in Claim 12, stored on a computer readable medium.
- 30 14. A broadcast system having a plurality of transmitters for delivering content to terminals in respective locations each transmitter operating in accordance with a set of operational characteristics comprising:

means for determining a distribution of terminals for delivery of common content; and

means for varying the operational characteristics of a transmitter responsive to the determined distribution of terminals.

5

15. A method using a plurality of transmitters for delivering content to terminals in respective locations comprising determining a distribution of terminals receiving common content and varying a set of operational characteristics of a transmitter responsive to the distribution of terminals.

10

16. A terminal for receiving content from a broadcast network having a plurality of transmitters for delivering content to terminals in respective locations each transmitter operating in accordance with a variable set of operational characteristics, the terminal comprising means operable to receive a signal indicative of the operational characteristics of a transmitter whereby the receiving means is operable to receive content delivered in accordance with the signal.

15

17. A method of receiving content from a broadcast network having a plurality of transmitters each transmitter operating in accordance with a variable set of operational characteristics, the method comprising receiving a signal indicative of operational characteristics of a transmitter delivering said content and changing reception characteristics in accordance therewith.

20

25

18. A method as claimed in Claim 17, including the step of consulting a further signal for said reception characteristics required to receive said content.

30

19. A computer program comprising executable code for execution when loaded on a computer, wherein the computer is operable in accordance

with said code to carry out the method according to any one of Claims 17 or 18.

20. A computer program as claimed in Claim 19, stored on a computer
5 readable medium.

1 / 4

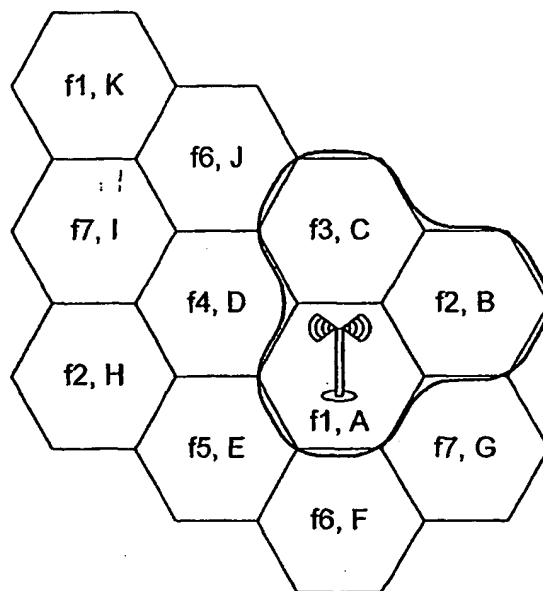


FIG. 1
PRIOR ART

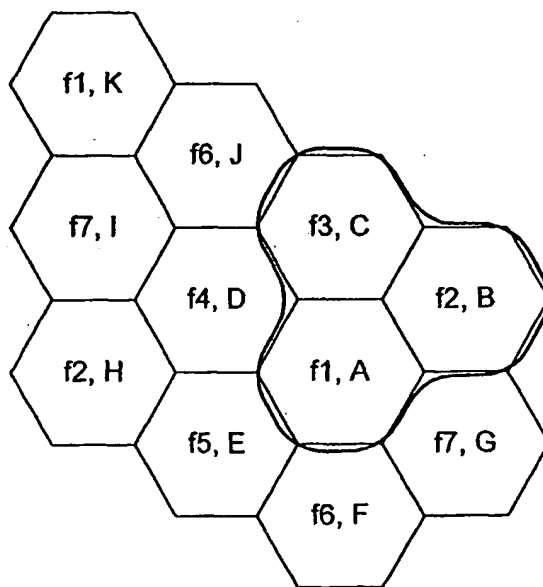


FIG. 3

2 / 4

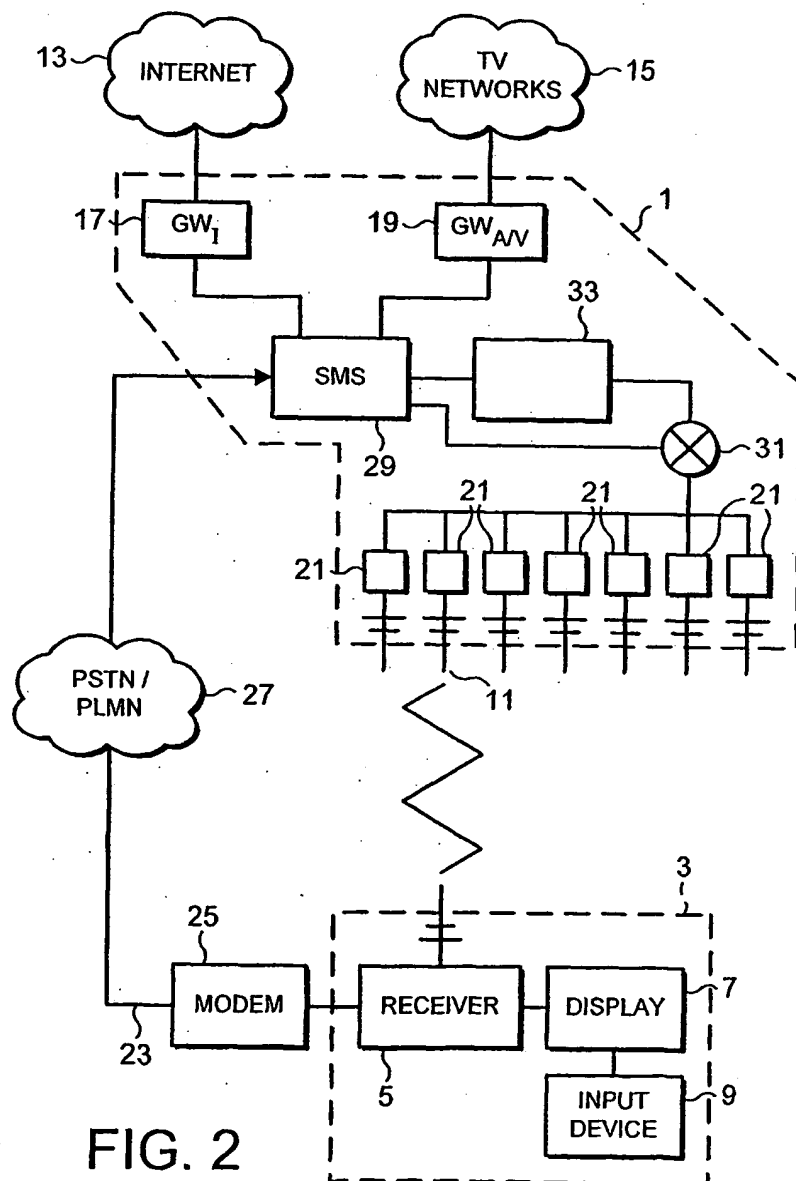


FIG. 2

3/4

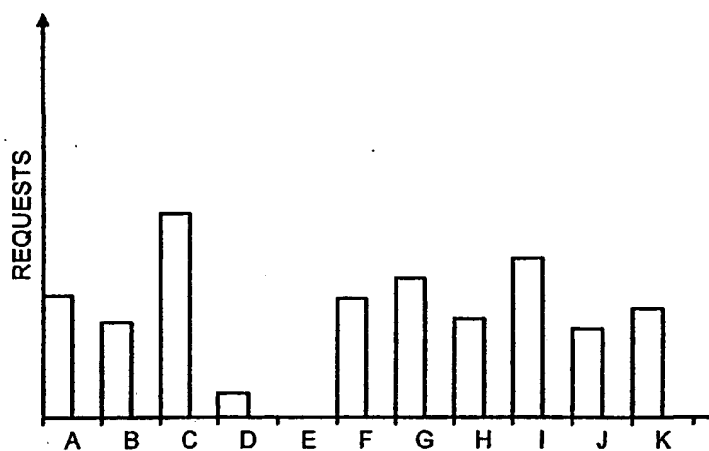


FIG. 4a

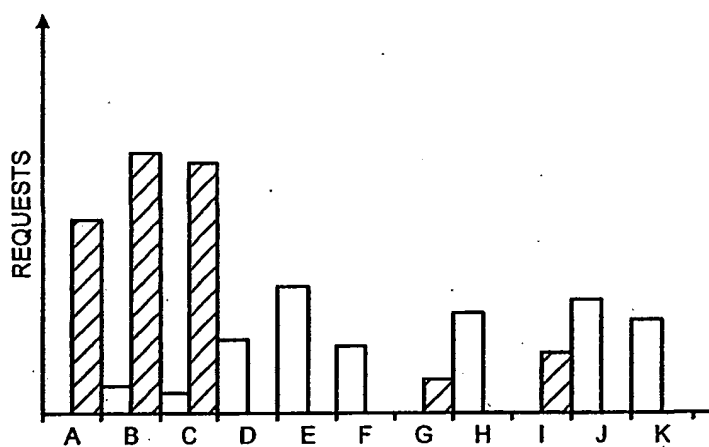


FIG. 4b

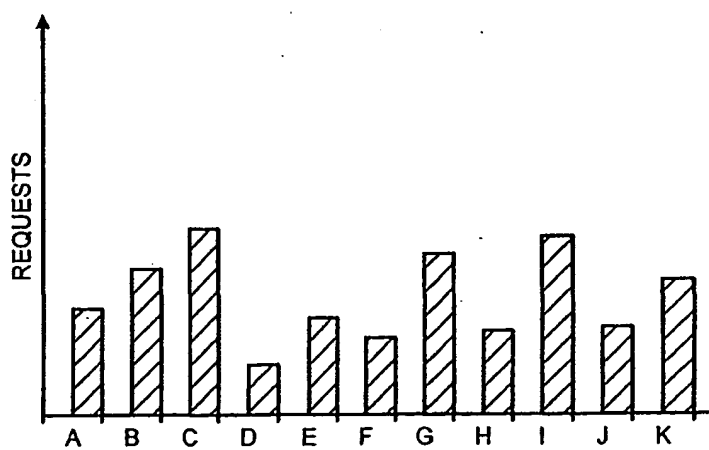


FIG. 4c

4 / 4

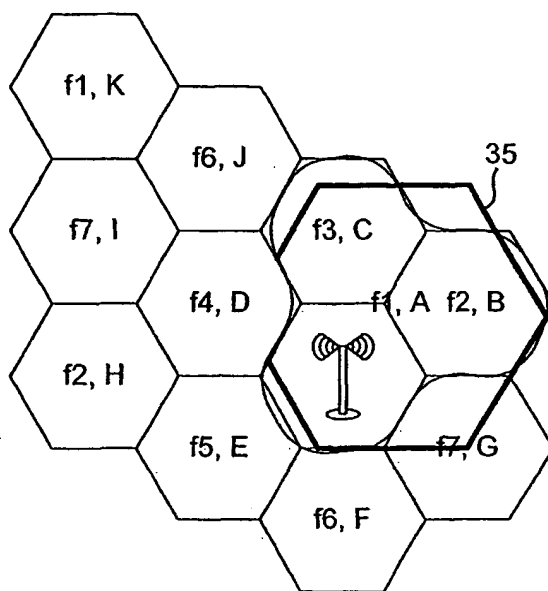


FIG. 5

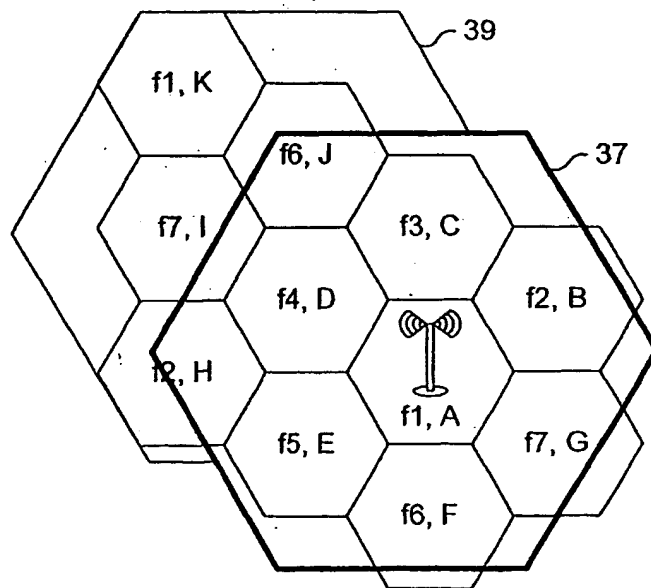


FIG. 6

INTERNATIONAL SEARCH REPORT

In national Application No

EPC 01/07240

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/22 H04Q11/04 H04Q7/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| A | WO 99 33076 A (TERACOM AB.) 1 July 1999 (1999-07-01) abstract; figure 1 page 22, line 24 -page 23, line 8 | 1 |
| A | EP 0 627 830 A (TV/COM TECHNOLOGIES, INC.) 7 December 1994 (1994-12-07) abstract; figures 1,3,4 column 9, line 26 -column 10, line 10 | 16-18 |
| A | WO 93 12587 A (NOKIA TELECOMMUNICATIONS OY.) 24 June 1993 (1993-06-24) page 6, line 11 - line 20; figure 1 | 5,6 |
| | -/- | |

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

19 September 2001

Date of mailing of the international search report

04/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Danielidis, S

INTERNATIONAL SEARCH REPORT

h International Application No
PCT/EP 01/07240

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|--|--|-----------------------|
| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| A | WO 95 22210 A (QUALCOMM INC.) 17 August 1995 (1995-08-17) abstract; figures 1A-1C page 8, line 4 - line 30 page 9, line 15 - line 35 | 1 |
| A | GB 2 318 483 A (MOTOROLA LTD.) 22 April 1998 (1998-04-22) page 5, line 13 - line 34; figures 1,3 | 1 |
| A | WO 93 23935 A (SIEMENS AG.) 25 November 1993 (1993-11-25) abstract; claims 2,3; figures 1,4 page 1, line 15 - line 20 page 2, line 5 - line 12 | 1 |
| A | WO 99 60659 A (RAYTHEON COMPANY) 25 November 1999 (1999-11-25) abstract; claims 9,13; figures 1A-2,8 | 1 |

INTERNATIONAL SEARCH REPORT

In ☐ International Application No
PCT/EP 01/07240

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| WO 9933076 | A | 01-07-1999 | SE 513018 C2 | 19-06-2000 |
| | | | AU 1991599 A | 12-07-1999 |
| | | | BR 9814293 A | 10-10-2000 |
| | | | CN 1285079 T | 21-02-2001 |
| | | | DE 29824485 U1 | 12-04-2001 |
| | | | FI 20002779 A | 19-12-2000 |
| | | | GB 2355896 A | 02-05-2001 |
| | | | NO 20006499 A | 07-02-2001 |
| | | | PL 341360 A1 | 09-04-2001 |
| | | | SE 9704813 A | 20-06-1999 |
| | | | WO 9933076 A1 | 01-07-1999 |
| EP 627830 | A | 07-12-1994 | US 5504785 A | 02-04-1996 |
| | | | AT 137372 T | 15-05-1996 |
| | | | AU 692448 B2 | 11-06-1998 |
| | | | AU 6916994 A | 20-12-1994 |
| | | | BR 9406664 A | 06-02-1996 |
| | | | CA 2161626 A1 | 08-12-1994 |
| | | | DE 69400162 D1 | 30-05-1996 |
| | | | DE 69400162 T2 | 12-12-1996 |
| | | | DK 627830 T3 | 26-08-1996 |
| | | | EP 0627830 A1 | 07-12-1994 |
| | | | ES 2088697 T3 | 16-08-1996 |
| | | | GR 3020548 T3 | 31-10-1996 |
| | | | HK 150796 A | 16-08-1996 |
| | | | IL 109736 A | 13-07-1997 |
| | | | JP 9501279 T | 04-02-1997 |
| | | | SI 627830 T1 | 31-10-1997 |
| | | | WO 9428657 A1 | 08-12-1994 |
| | | | US 5612975 A | 18-03-1997 |
| WO 9312587 | A | 24-06-1993 | FI 915886 A | 14-06-1993 |
| | | | AT 130141 T | 15-11-1995 |
| | | | AU 665596 B2 | 11-01-1996 |
| | | | AU 3087992 A | 19-07-1993 |
| | | | DE 69205993 D1 | 14-12-1995 |
| | | | DE 69205993 T2 | 11-04-1996 |
| | | | EP 0616741 A1 | 28-09-1994 |
| | | | WO 9312587 A1 | 24-06-1993 |
| | | | JP 7501914 T | 23-02-1995 |
| | | | NO 942190 A | 10-08-1994 |
| | | | US 5805996 A | 08-09-1998 |
| WO 9522210 | A | 17-08-1995 | AU 682939 B2 | 23-10-1997 |
| | | | AU 1876295 A | 29-08-1995 |
| | | | BR 9506683 A | 16-09-1997 |
| | | | CA 2183258 A1 | 17-08-1995 |
| | | | CN 1146832 A | 02-04-1997 |
| | | | EP 0775393 A2 | 28-05-1997 |
| | | | FI 963153 A | 10-10-1996 |
| | | | JP 10500807 T | 20-01-1998 |
| | | | WO 9522210 A2 | 17-08-1995 |
| | | | ZA 9500797 A | 20-06-1996 |
| GB 2318483 | A | 22-04-1998 | AU 4299097 A | 15-05-1998 |
| | | | WO 9818278 A1 | 30-04-1998 |
| | | | EP 0932994 A1 | 04-08-1999 |
| | | | JP 2001502862 T | 27-02-2001 |

INTERNATIONAL SEARCH REPORT

In International Application No
PCT/EP 01/07240

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| WO 9323935 | A | 25-11-1993 | AT 145774 T | 15-12-1996 |
| | | | WO 9323935 A1 | 25-11-1993 |
| | | | DE 59304624 D1 | 09-01-1997 |
| | | | DK 640260 T3 | 07-04-1997 |
| | | | EP 0640260 A1 | 01-03-1995 |
| | | | ES 2095054 T3 | 01-02-1997 |
| | | | FI 945361 A | 14-11-1994 |
| | | | GR 3021796 T3 | 28-02-1997 |
| WO 9960659 | A | 25-11-1999 | AU 4308899 A | 06-12-1999 |
| | | | WO 9960659 A1 | 25-11-1999 |
| | | | US 6236866 B1 | 22-05-2001 |